

# PowerPlay




TigerTurf's PowerPlay shock pad reduces the impact of playground injuries by increasing safety. In combination with TigerTurf's 35mm landscape and TigerPlay playground synthetic turf surfaces, high critical fall height ratings are achieved up to 3 metres.

PowerPlay shock pad is a durable and consistent shock pad for under multi-sport surfaces, playgrounds and synthetic landscaped areas that require HIC certification. PowerPlay can be re-used with new synthetic grass or it can be disposed of as it is 100% recyclable.

// Certified up to 3m

// 100% recyclable

// Shock and drainage pad

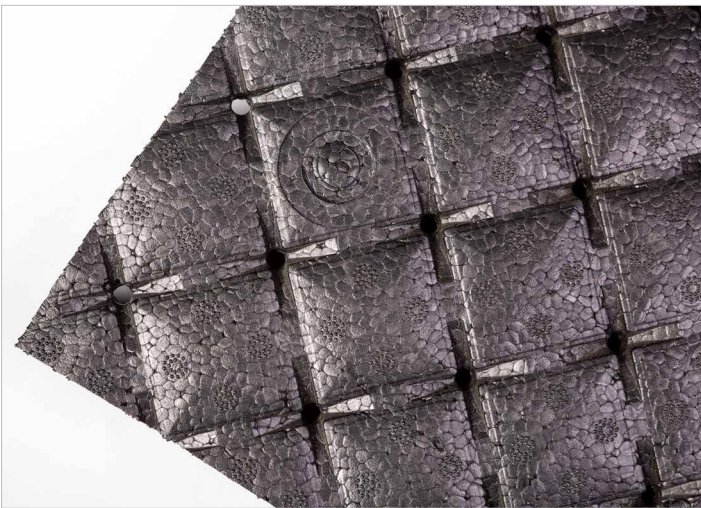

# PowerPlay



## Installation & Maintenance

// **Product guarantees are subject to approved installation and maintenance. Refer to installation and maintenance guides for details.**



## Guarantee

// **TigerTurf offer a 5 year limited warranty and guarantee with TigerTurf PowerPlay. Please refer to TigerTurf for full details and conditions.**

## Product attributes

Composition	Polyolefine (100%)
Water permeability	60 l/h
Horizontal waterflow (0.5% slope)	0.8 s/m
Shock pad type	Thermically bonded Polyolefine
Shock pad thickness	22mm, 35mm, 45mm
Warranty	5 years manufacturer's warranty
Colour	Black

## HIC value

BASE	GRASS	SAND INFILL	PowerPlay	FALL HEIGHT
Concrete	35mm Landscape Grass	12kg/m <sup>2</sup>	1 x 22mm PowerPlay 1 x 45mm PowerPlay	3 metres
Concrete	TigerPlay	12kg/m <sup>2</sup>	1 x 22mm PowerPlay 1 x 45mm PowerPlay	3 metres
Concrete	35mm Landscape Grass	12kg/m <sup>2</sup>	1 x 45mm PowerPlay	2.5 metres
Concrete	TigerPlay	12kg/m <sup>2</sup>	1 x 45mm PowerPlay	2.4 metres
Concrete	TigerPlay	12kg/m <sup>2</sup>	1 x 35mm PowerPlay	1.9 metres
Concrete	35mm Landscape Grass	12kg/m <sup>2</sup>	1 x 35mm PowerPlay	1.8 metres
Concrete	35mm Landscape Grass	12kg/m <sup>2</sup>	1 x 22mm PowerPlay	1.4 metres
Concrete	TigerPlay	12kg/m <sup>2</sup>	1 x 22mm PowerPlay	1.4 metres

The above critical fall heights are measured according to the procedure set down in AS 4422:2016 and NZS5828:2015 and satisfy the impact attenuation requirements of AS 4422:2016, AS 4685.1:2014 and NZS5828:2015 up to the stated critical fall height when installed and maintained in good condition to the required installation thickness. Please note the values quoted are within the tolerance accepted by the industry. TigerTurf reserve the right to amend product specifications at their discretion. TigerTurf is not legally responsible in case of non-compliance with the above-mentioned specifications.



TigerTurf Americas  
Tiger Express  
1400 North Daly Street  
Anaheim, CA 92806  
USA

Freephone 800 464 0477  
USinfo@tigerturf.com

TigerTurf Australia  
Pty Ltd  
14 Latitude Boulevard  
Thomastown, Victoria  
Australia 3074

Tel +61 3 9464 5052  
Freephone 1 800 802 570  
AUinfo@tigerturf.com

TigerTurf Asia  
TenCate Grass Asia  
138 Robinson Road  
#17-03, Oxley Tower Lobby 2  
Singapore 068906

Tel +65 6282 7495  
ASinfo@tigerturf.com

TigerTurf India  
C/o Altius Sports & Leisure Pvt Ltd  
A-117, DDA Sheds, Okhla Phase 2  
New Delhi 110 020

Tel: +91 98362 77678 (SPORT)  
INinfo@tigerturf.com

TigerTurf NZ Ltd  
384 Neilson Street  
Penrose, Auckland  
New Zealand 1061

Tel +64 9 634 4134  
Freephone 0800 804 134  
NZinfo@tigerturf.com

TigerTurf UK Ltd  
229 Ikon Droitwich Road  
Hartlebury, DY10 4EU  
United Kingdom

Tel +44 0 1299 253 966  
UKinfo@tigerturf.com

[tigerturf.com](http://tigerturf.com)